

CCT	White								Hi-Spectrum							
length	0.5FT	1FT	1.5FT	2FT	2.5FT	3FT	4FT	5FT	0.5FT	1FT	1.5FT	2FT	2.5FT	3FT	4FT	5FT
A(mm)	122	256	405	558	710	865	1170	1490	122	272	422	572	727	865	1170	1490
B(mm)	26.8±0.1								26.8±0.1							
C(mm)	11.3±0.1								11.3±0.1							

Specifications:



Model	Power	Maximum no. of interconnections	Input Voltage	CRI	Color Temperature	Operating Temperature
FDK-FSL-F0-006-024-XXK-D-C93	2.4W	20	DC24V	≥90	IP 65	2700-6000K HSP
FDK-FSL-F0-012-048-XXK-D-C93	4.8W	10				
FDK-FSL-F0-018-072-XXK-D-C93	7.2W	7				
FDK-FSL-F0-024-096-XXK-D-C93	9.6W	5				
FDK-FSL-F0-030-120-XXK-D-C93	12W	4				
FDK-FSL-F0-036-144-XXK-D-C93	14.4W	4				
FDK-FSL-F0-048-192-XXK-D-C93	19.2W	3				
FDK-FSL-F0-060-240-XXK-D-C93	24W	2				
FDK-FSL-F0-006-024-HSP-D	2.4W	20				
FDK-FSL-F0-012-048-HSP-D	4.8W	10				
FDK-FSL-F0-018-072-HSP-D	7.2W	7				
FDK-FSL-F0-024-096-HSP-D	9.6W	5				
FDK-FSL-F0-030-120-HSP-D	12W	4				
FDK-FSL-F0-036-144-HSP-D	14.4W	4				
FDK-FSL-F0-048-192-HSP-D	19.2W	3				
FDK-FSL-F0-060-240-HSP-D	24W	2				

Where “XXK” could be 27K, 30K, 35K, 40K, 45K, 50K, 60K or 65K which denotes color temperature of 2700K, 3000K, 3500K, 4000K, 4500K, 5000K, 6000K or 6500 and it also can be replaced by “HS” or “HSP” that denotes color temperature of Hi-spectrum.



Application

- Horizontal Refrigerated Display Coolers
- Canopy and Shelf Displays





LED Modules F0 for Refrigerated Display Cases

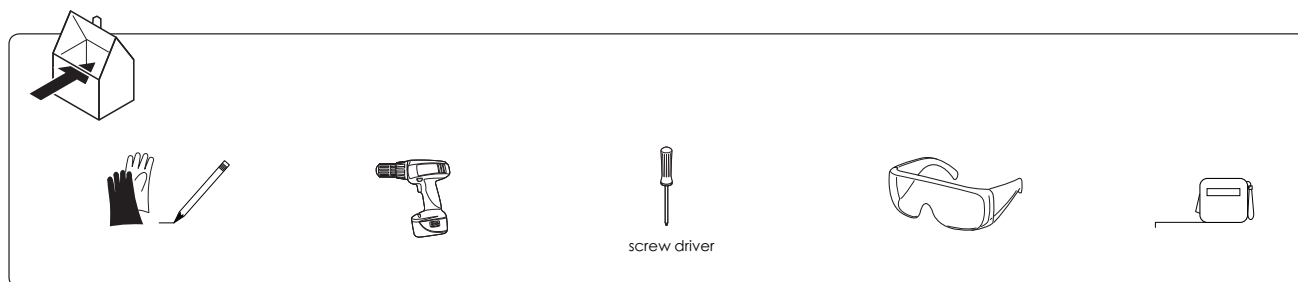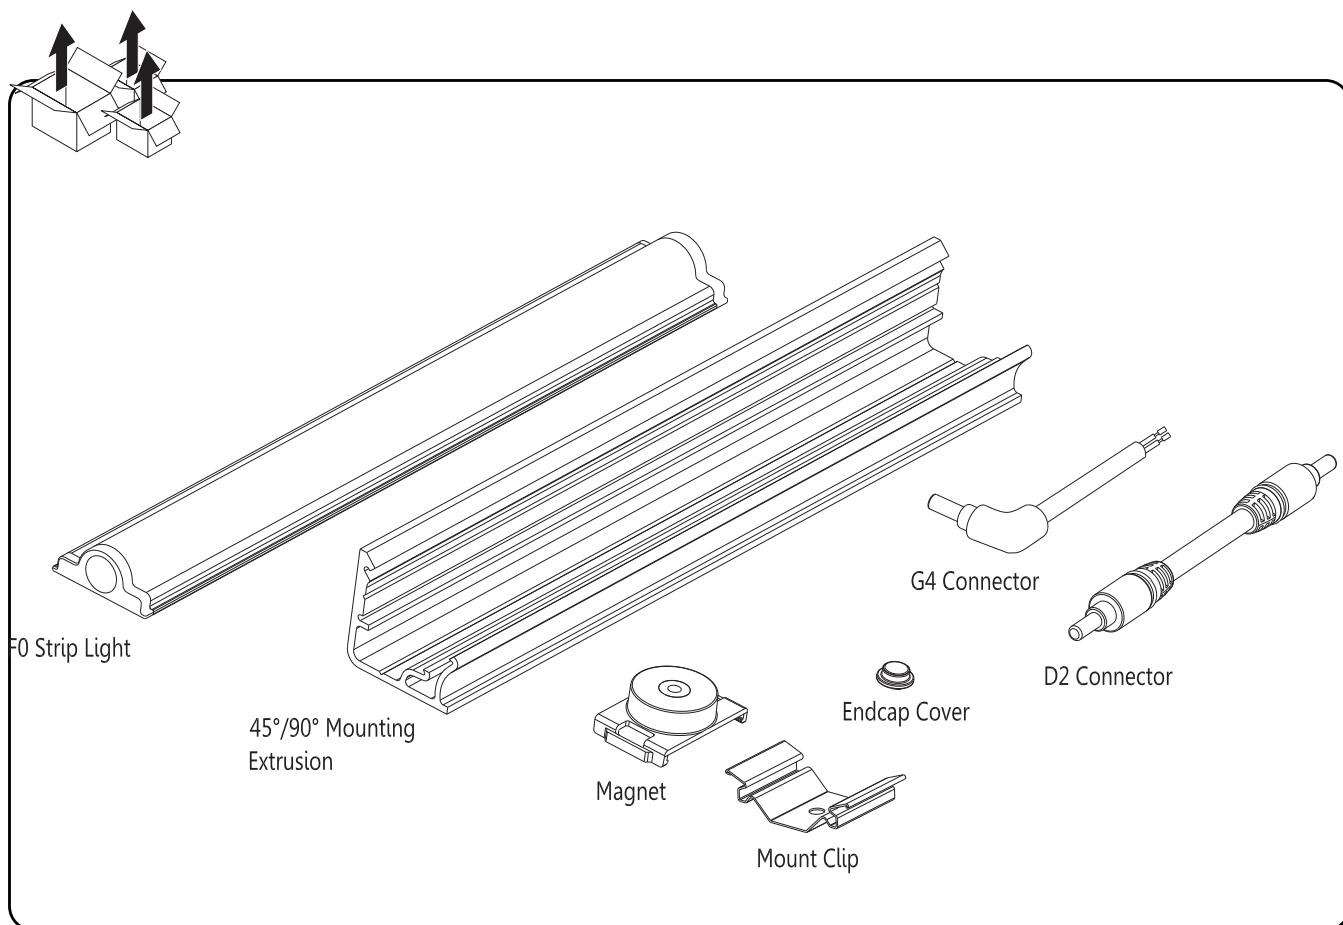


Start

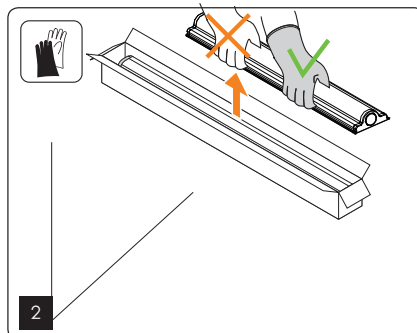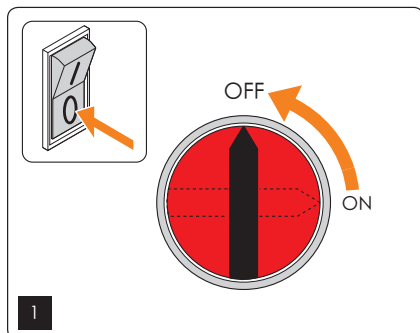

LED Modules F0

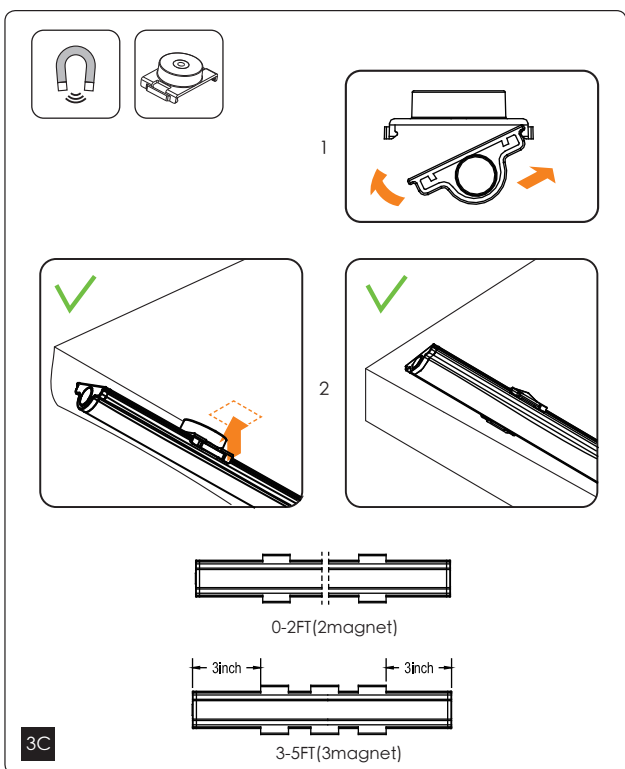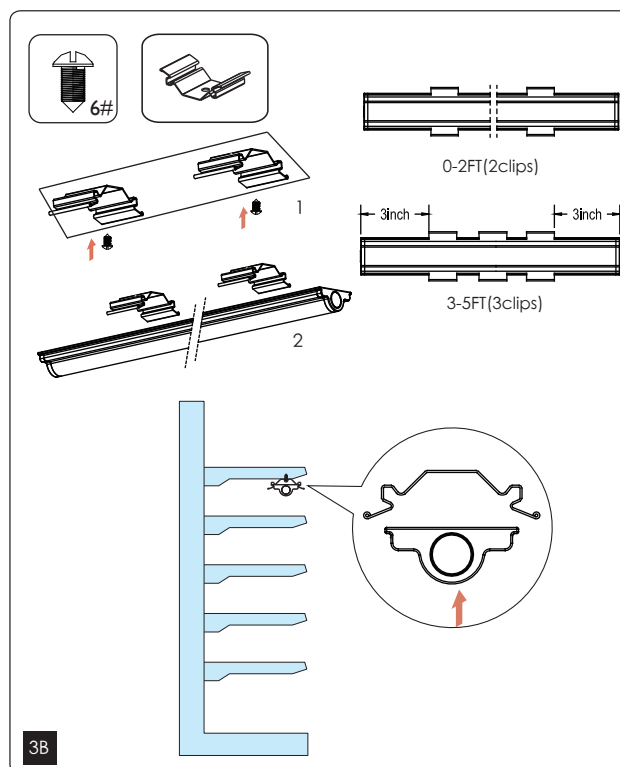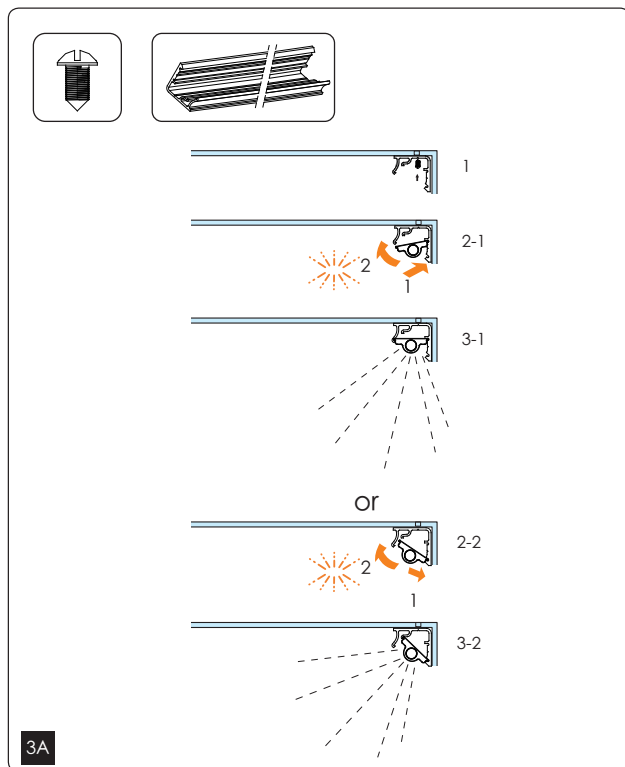

Create a fixture with F0 LED engines

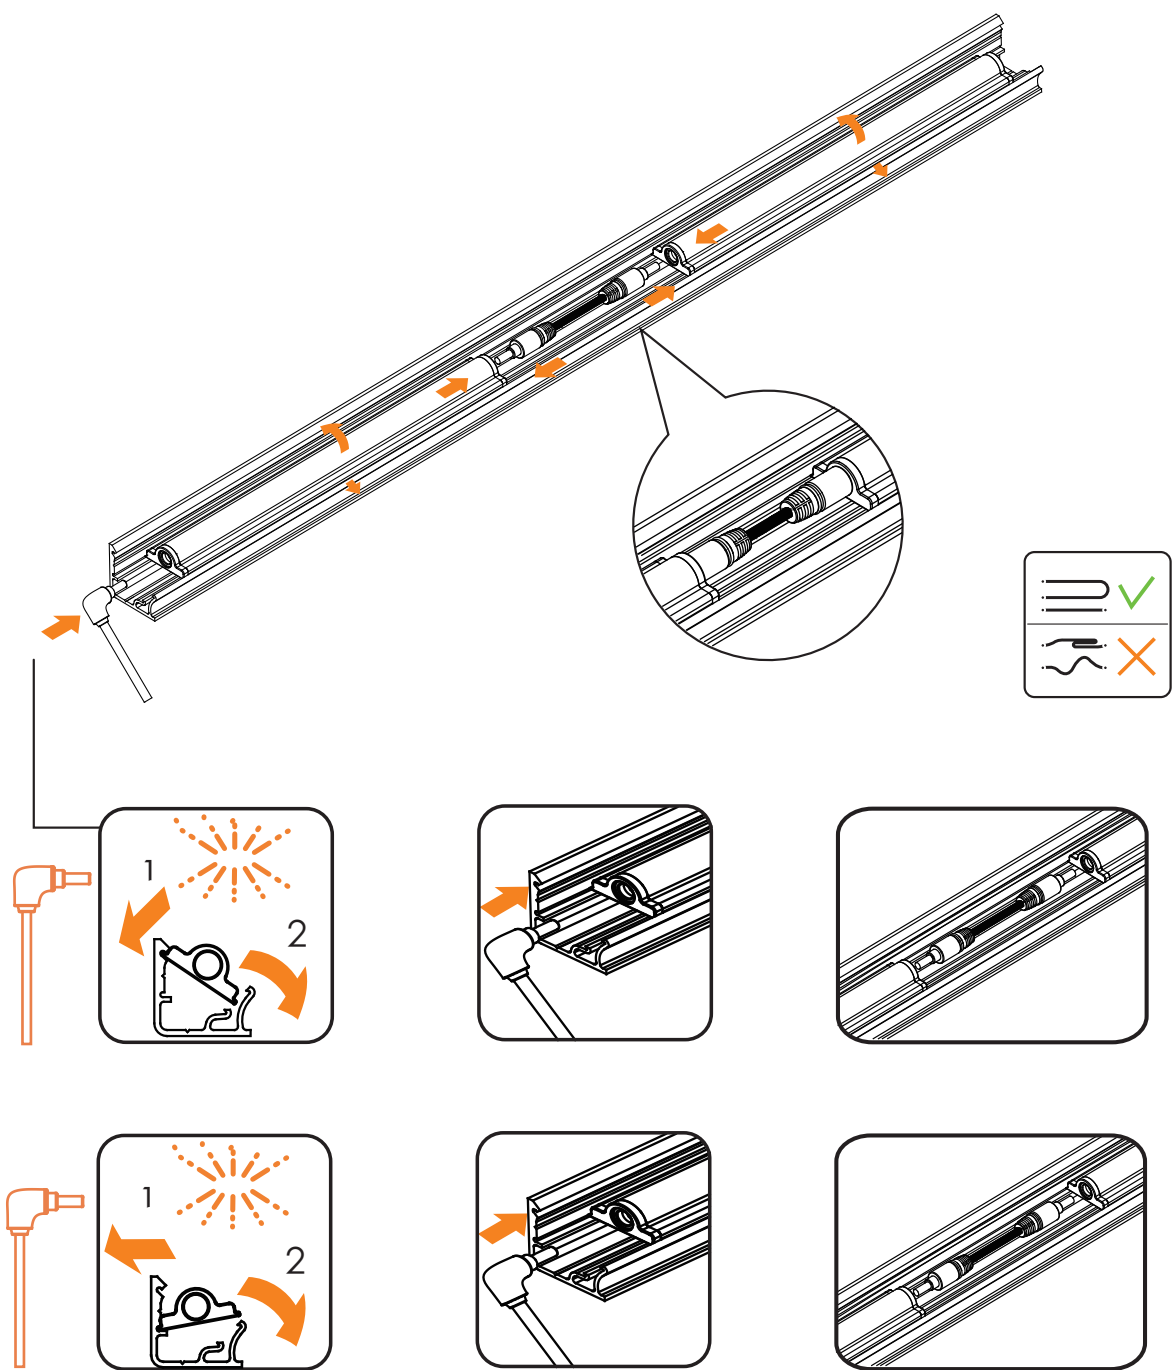

Wiring diagram

